

Cassette Seal

TYPE


AP28

Features

The rubber-covered O.D. ensures superior sealing, ideal for steel and cast iron housings. An internal labyrinth design with a spring-loaded dust lip provides enhanced dirt protection. Rubber I.D. ribs offer a reliable static seal, while grease-infused lips and bumpers maximize internal lubrication.

Material

Rubber: NBR (Standard)
Case: JIS G3141 SPCC (Standard)
Spring: JIS G3521 SW-C (Standard)

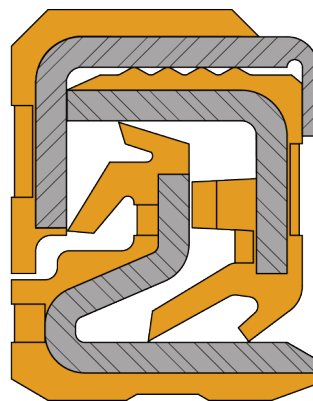

Operating Conditions

Media

Greases

Temperature

NBR: -40 ~ 80°C

Pressure

Not Allowed

Speed

$V \leq 2 \text{ m/s}$

NOTE:

1. The maximum operating temperature for NBR materials must not exceed 80°C.
2. Maximum permissible values depend on the other operating conditions.
3. Speed specification: DIN 3760 not applicable.



MADE IN TAIWAN **NAK**

PI202503AP28-01

Fitting and Installation

Careful installation according to DIN 3760 ensures the sealing function of the oil seal.

Shaft

Tolerance: ISO h8

Roughness: Ra 1.6 ~ 3.2 μm

Runout: < 0.25 mm

Bore

Tolerance: ISO H8

Roughness: Ra 1.6 ~ 3.2 μm



MADE IN TAIWAN **NAK**

PI202503AP28-01